



Noise



Fire



Solutions



SILVER

# Nofisol Seal S / ABS

## Technische Data :

- Lengte : 1200 of 600 mm, overige in overleg
- Breedte : 600 of 300 mm, overige in overleg
- Dikte : 20 – 100 mm
- Vulling : Steenwol
- Folie : Mat zwarte HDPE Folie
- Perforatie : Micro geperforeerd
- Dikte folie : Akoestisch open, 0.03 mm
- Densiteit steenwol : 35 kg/m<sup>3</sup> – 100 kg/m<sup>3</sup>
- Geluidabsorptie :  $\alpha_w$ - 0.95, NRC 0.90 bij 25 mm materiaal dikte<sup>(7)</sup>
- Eurobrandklasse materialen<sup>4</sup>
  - Steenwol : A1<sup>(4)</sup>
  - PE Folie : B-s1,d0<sup>(5)</sup>


Cradle to Cradle Certified™

: Silver



LEED Credits

- : LEED Material Ingredient Disclosure Credit Eligible
- : LEED Material Ingredient Optimization Credit Eligible

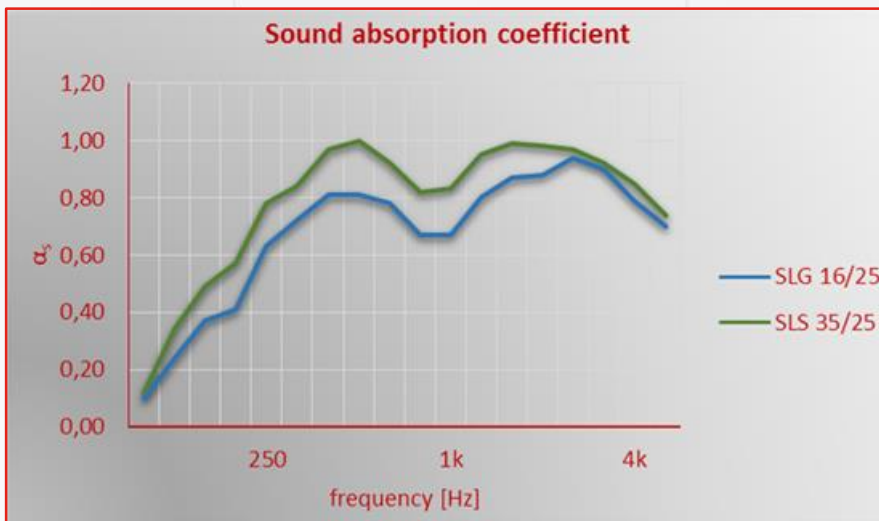

Cradle to Cradle certified™ Product Scorecard Nofisol Seal S					
Quality Category	Basic	Bronze	Silver	Gold	Platinum
Material Health			✓		
Material Reutilization			✓		
Renewable Energy & Carbon Management				✓	
Water Stewardship					✓
Social Fairness				✓	
Overall Certification Level			✓		

Nofisol

Noise Fire Solutions

Nofisol Europe BV

T : 0162-431231

E : Europe@nofisol.com

www.nofisol.com

2019\_Seal\_S\_v1.1